



Plate Freezer Filling Arm

EQUIPMENT HIGHLIGHTS

- Articulating double-joint arm for flexible filling.
- Full Sanitary Design.
- 3" Triclamp connection.
- 40' (12m) circular filling reach.
- Fully Sealed Slewing Ring Bearings.
- Custom Triclamp Fittings Swivel Under Pressure.

“The POSS Plate Freezer Filling Arm Maintains a Low Cost of Ownership and Long Reach Filling Capability”

POSS Design Limited
 “World Leader in Quality Separation Solutions since 1978”

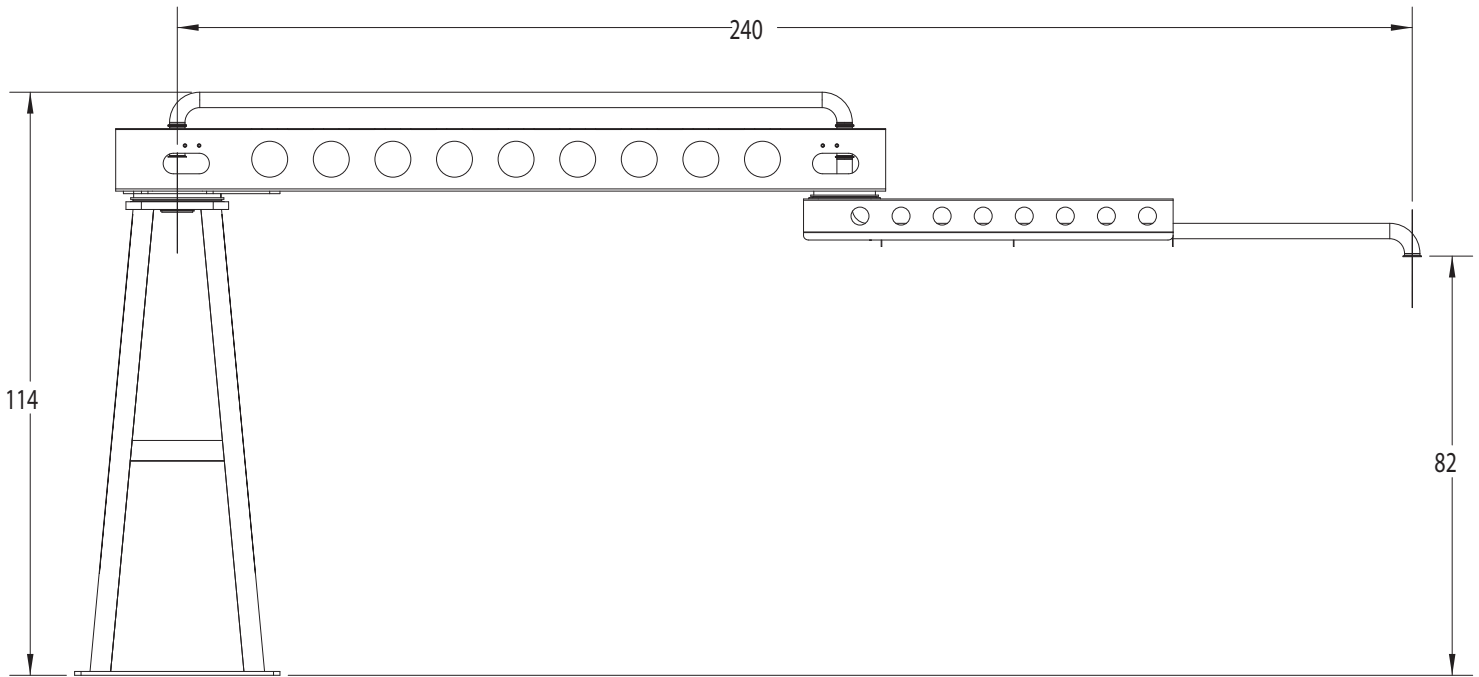


Plate Freezer Filling Arm

TECH SPECS

INPUT CAPACITY Up to 10,000 kg/hr (22,000 lbs/hr)

STANDARD CONFIGURATION 3" Triclamp

POWER REQUIREMENT None

SANITATION Clean In Place

MOUNTING Floor Anchor

STANDARD REACH 12m (40')

FEATURES Open Channel Sanitary Design

CONTROLS Stand Alone or Integrated

NOTES:

POSS Design Limited
 "World Leader in Quality Separation Solutions since 1978"