

# PSC 2500 Pork Skin Cleaner


## EQUIPMENT HIGHLIGHTS

- Up to 2,500 kg/hr (5,500 lbs/hr) input capacity.
- 6" Dual Screw + Knife Configuration.
- 10" Head length.
- 50 hp (37 kW) Motor.
- POSS Flow-Through Restrictor.
- Integrated head cover & residue chute.
- Specially designed to simultaneously clean fat from skin & pre-size skin into smaller pieces for further processing.

**“POSS Maintains the Highest Yields and Lowest Temperature Rise in the Industry”**

POSS Design Limited

“World Leader in Quality Separation Solutions since 1978”

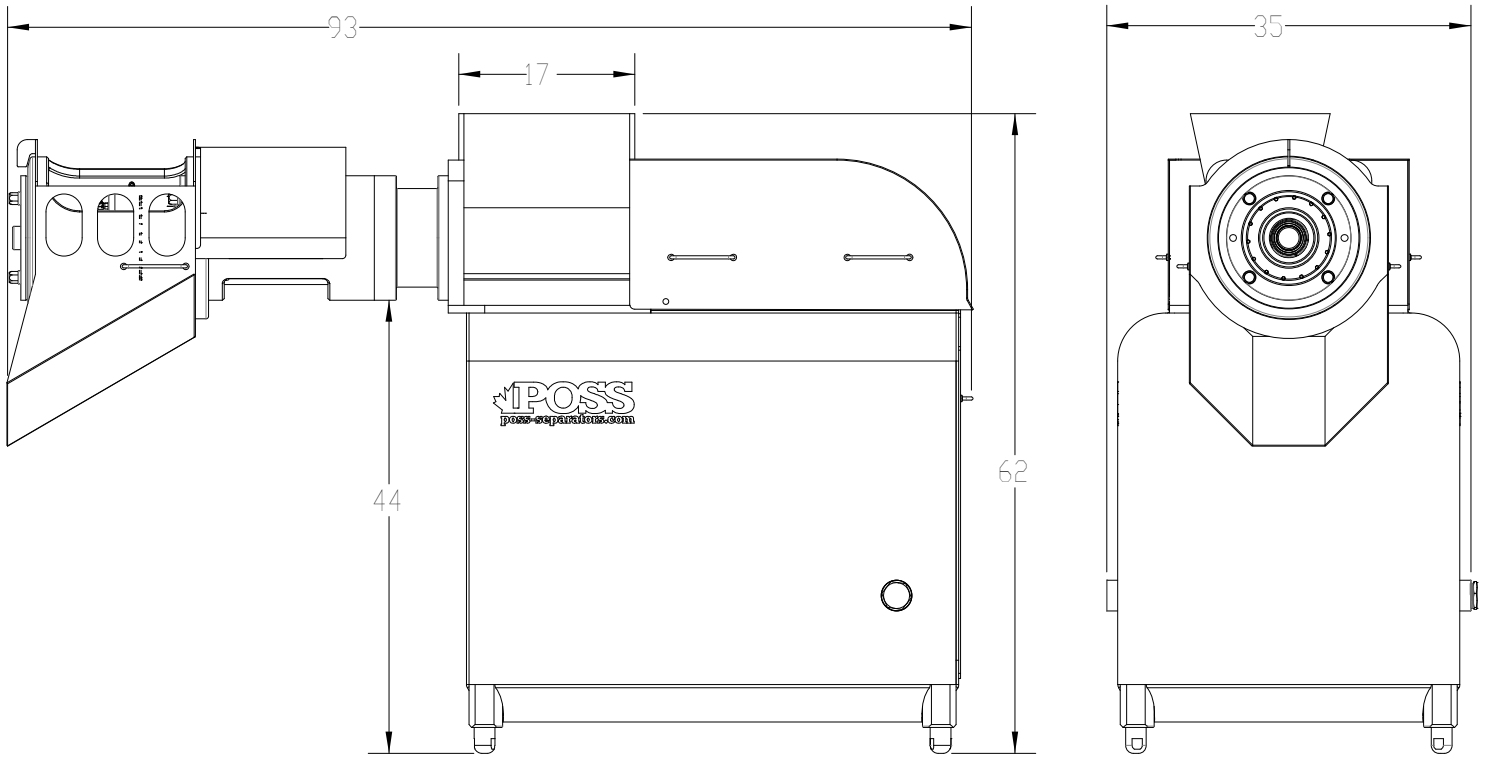

# PSC 2500 Pork Skin Cleaner

## TECH SPECS

INPUT CAPACITY	Up to 2,500 kg/hr (5,500 lbs/hr)
STANDARD CONFIGURATION	6" Dual Screws + Knife
MACHINE POWER	50 hp (37 kW)
TRANSMISSION	Extruder Belt Drive
HOPPER GEOMETRY	17" x 13"
HOPPER EXTENSION	Customizable
HEAD GEOMETRY	6" x 10" (Head Shroud Available)
CONTROLS	HMI Control Panel with line integration
MACHINE WEIGHT	4,000 lbs (2,500 kg)
SCREW SPEED	180 RPM @ 60 Hz

## NOTES:

---

---

---

---

---

---

---

---

---

---

POSS Design Limited  
 "World Leader in Quality Separation Solutions since 1978"