

PSC 2500 Pork Skin Cleaner


EQUIPMENT HIGHLIGHTS

- Up to 2,500 kg/hr (5,500 lbs/hr) input capacity.
- 6" Dual Screw + Knife Configuration.
- 10" Head length.
- 50 hp (37 kW) Motor.
- POSS Flow-Through Restrictor.
- Integrated head cover & residue chute.
- Specially designed to simultaneously clean fat from skin & pre-size skin into smaller pieces for further processing.

“POSS Maintains the Highest Yields and Lowest Temperature Rise in the Industry”

POSS Design Limited

“World Leader in Quality Separation Solutions since 1978”

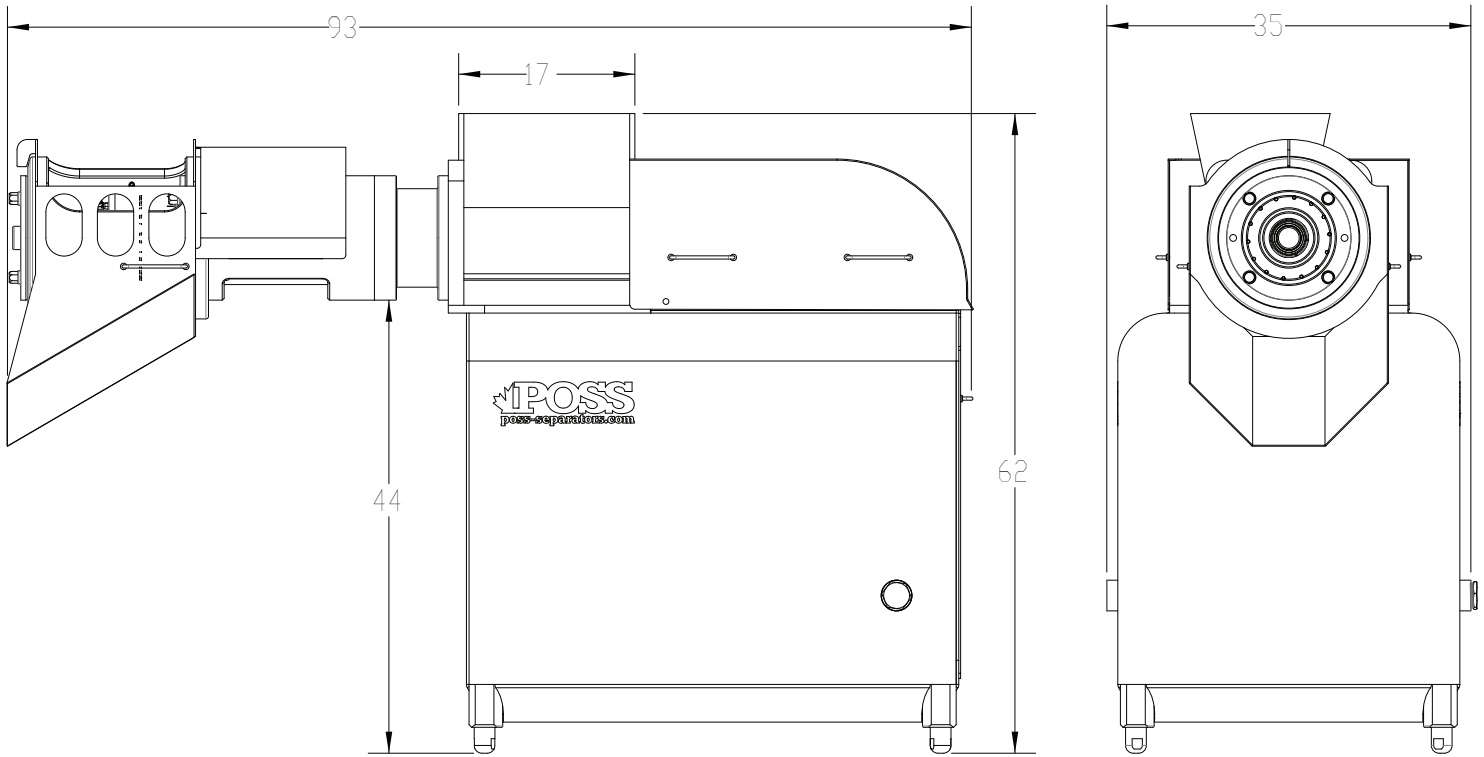

PSC 2500 Pork Skin Cleaner

TECH SPECS

INPUT CAPACITY	Up to 2,500 kg/hr (5,500 lbs/hr)
STANDARD CONFIGURATION	6" Dual Screws + Knife
MACHINE POWER	50 hp (37 kW)
TRANSMISSION	Extruder Belt Drive
HOPPER GEOMETRY	17" x 13"
HOPPER EXTENSION	Customizable
HEAD GEOMETRY	6" x 10" (Head Shroud Available)
CONTROLS	HMI Control Panel with line integration
MACHINE WEIGHT	4,000 lbs (2,500 kg)
SCREW SPEED	180 RPM @ 60 Hz

NOTES:

POSS Design Limited
 "World Leader in Quality Separation Solutions since 1978"