

# ProMax 6000


## EQUIPMENT HIGHLIGHTS

- 5,000 kg/hr (11,000 lbs/hr) input capacity.
- 6" Separation screw (single or dual screws).
- 10" Head length (screen plates or perforated).
- 40-60 hp (37-45 kW) Motor.
- POSS Auto Restrictor option available.
- Integrated head cover & residue chute.

**“POSS Maintains the Highest Yields and Lowest Temperature Rise in the Industry”**

POSS Design Limited

“World Leader in Quality Separation Solutions since 1978”

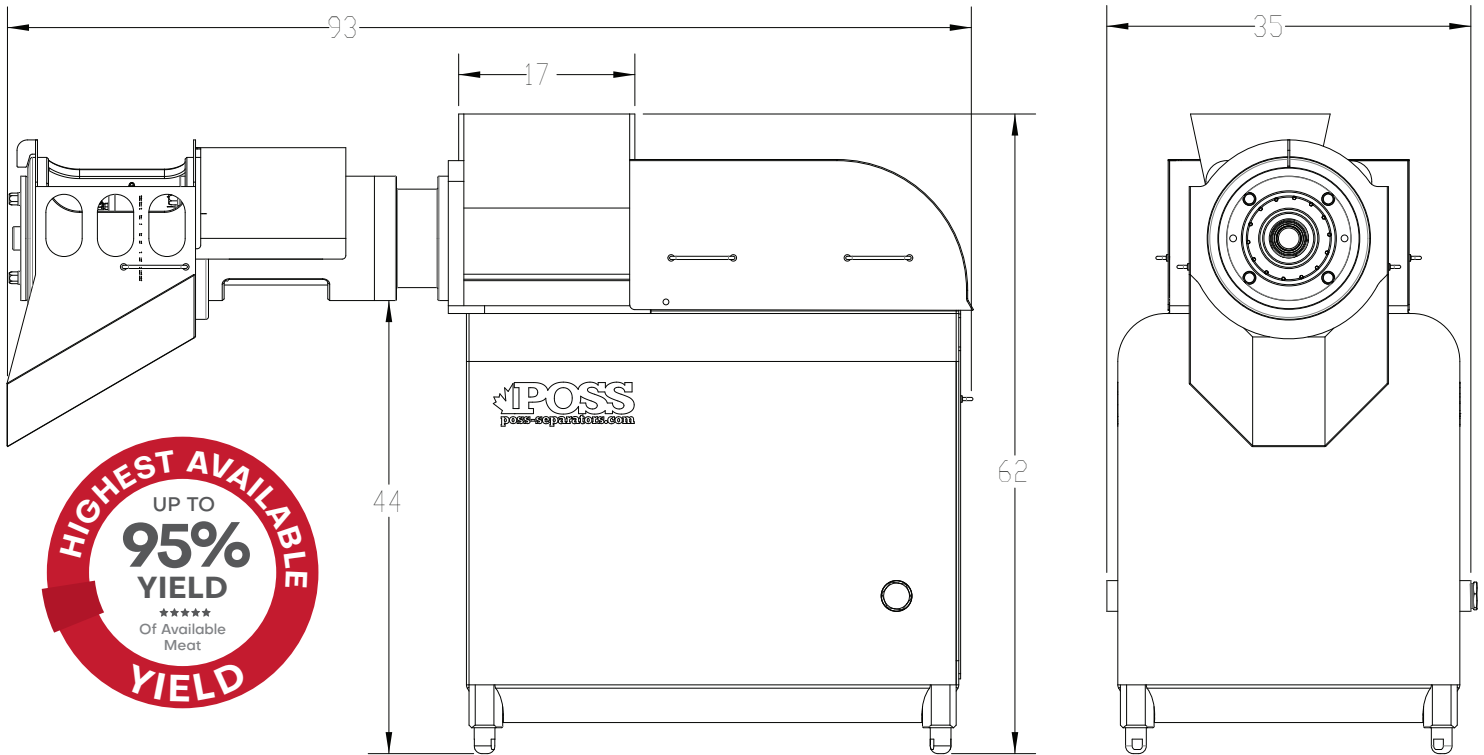

# ProMax 6000

## TECH SPECS

|                        |   |
|------------------------|---|
| INPUT CAPACITY         | Up to 5,000 kg/hr (11,000 lbs/hr)       |
| STANDARD CONFIGURATION | 6" Single or Dual Screws                |
| MACHINE POWER          | 40-60 hp (37-45 kW)                     |
| TRANSMISSION           | Extruder Belt Drive                     |
| HOPPER GEOMETRY        | 17" x 13"                               |
| HOPPER EXTENSION       | Customizable                            |
| HEAD GEOMETRY          | 6" x 10" (Head Shroud Available)        |
| CONTROLS               | HMI Control Panel with line integration |

## NOTES:

---

---

---

---

---

---

---

---

POSS Design Limited  
 "World Leader in Quality Separation Solutions since 1978"