

PSC 2500 Pork Skin Cleaner

EQUIPMENT HIGHLIGHTS


- Up to 2,500 kg/hr (5,500 lbs/hr) input capacity.
- 6" Dual Screw + Knife Configuration.
- 10" Head length.
- 50 hp (37 kW) Motor.
- POSS Flow-Through Restrictor.
- Integrated head cover & residue chute.
- Specially designed to simultaneously clean fat from skin & pre-size skin into smaller pieces for further processing.

“POSS Maintains the Highest Yields and Lowest Temperature Rise in the Industry”

“World Leader in Quality Separation Solutions since 1978”



A DURAVANT COMPANY

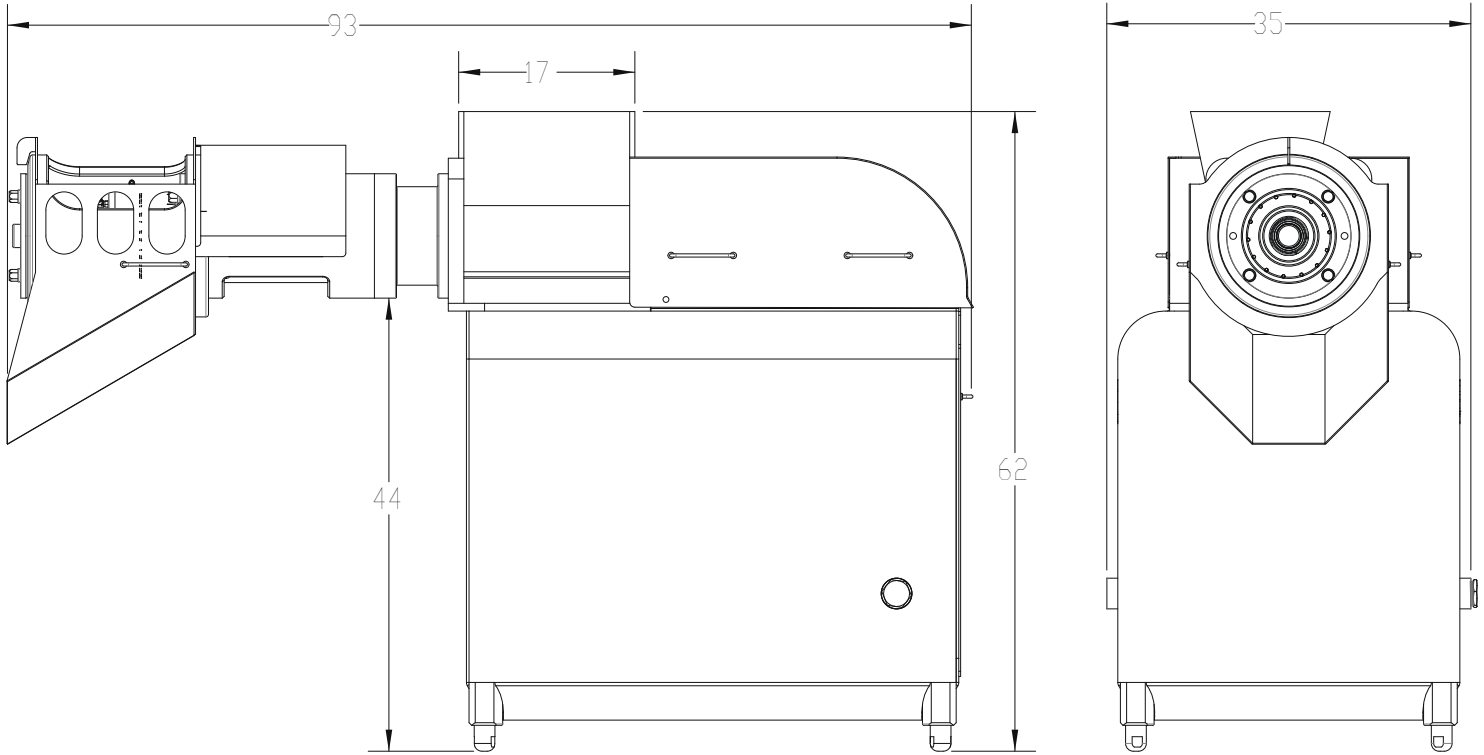

PSC 2500 Pork Skin Cleaner

TECH SPECS

| | |
|------------------------|---|
| INPUT CAPACITY | Up to 2,500 kg/hr (5,500 lbs/hr) |
| STANDARD CONFIGURATION | 6" Dual Screws + Knife |
| MACHINE POWER | 50 hp (37 kW) |
| TRANSMISSION | Extruder Belt Drive |
| HOPPER GEOMETRY | 17" x 13" |
| HOPPER EXTENSION | Customizable |
| HEAD GEOMETRY | 6" x 10" (Head Shroud Available) |
| CONTROLS | HMI Control Panel with line integration |
| MACHINE WEIGHT | 4,000 lbs (2,500 kg) |
| SCREW SPEED | 180 RPM @ 60 Hz |

NOTES:

"World Leader in Quality Separation Solutions since 1978"