



A DURAVANT COMPANY




# Plate Freezer Filling Arm

## EQUIPMENT HIGHLIGHTS

- Articulating double joint arm for flexible filling.
- Full Sanitary Design.
- 3" Triclamp connection.
- 40' (12m) circular filling reach.
- Fully Sealed Slewing Ring Bearings.
- Custom Triclamp Fittings Swivel Under Pressure.

**“The POSS Plate Freezer Filling Arm Maintains a Low Cost of Ownership and Long Reach Filling Capability”**

“World Leader in Quality Separation Solutions since 1978”

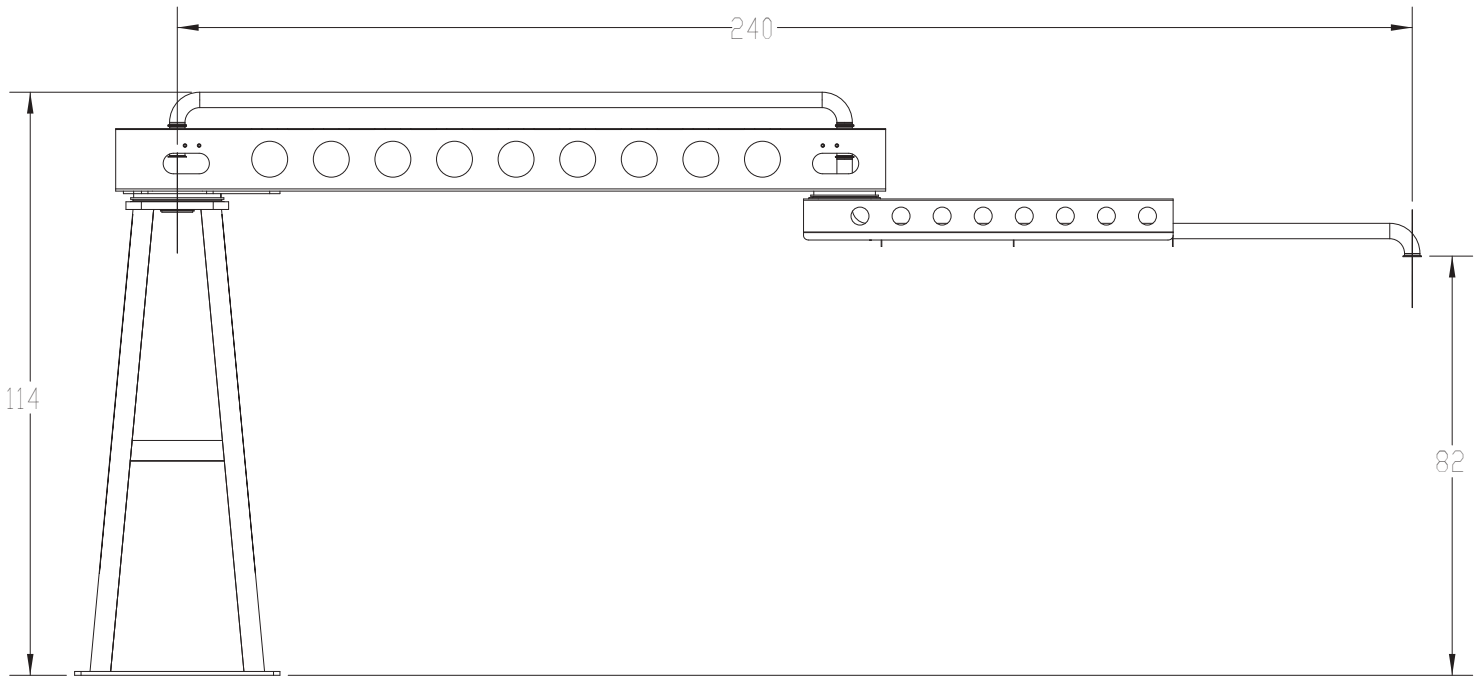

# Plate Freezer Filling Arm

## TECH SPECS

INPUT CAPACITY	Up to 11,800 kg/hr (26,000 lbs/hr)
STANDARD CONFIGURATION	3" Triclamp
POWER REQUIREMENT	None
SANITATION	Clean In Place
MOUNTING	Floor Anchor
STANDARD REACH	12m (40')
FEATURES	Open Channel Sanitary Design
CONTROLS	Stand Alone or Integrated

## NOTES:

---



---



---



---



---



---



---



---

"World Leader in Quality Separation Solutions since 1978"